

NOVEL PROCESSES FOR DECOLORIZATION OF COLORED EFFLUENTS**Cross Reference to Related Applications**

5 This application is a national phase application filed under 35 U.S.C. § 371 of PCT Application Number PCT/IN2005/000396, filed February 12, 2005, which claims priority from Indian Patent Application number 2420/DEL/2004, filed December 12, 2004.

Field of Invention

10 The present invention relates to a novel process for decolorization of colored effluents. More particularly it relates to a process for decolorization of colored effluents of textile mills, dye-making industries, paper and pulp industries and molasses spent wash from alcohol distilleries using an unidentified marine fungus NIOCC #2a isolated from mangrove wood and deposited in the microbial type culture collection (MTCC) of the Institute of Microbial Technology, Chandigarh, India, under the accession number 15 MTCC 5159. Further, this invention relates to decolorization of these effluents using the fungus directly, its cell-free culture supernatant or immobilized fungus or extracellular polymeric substances produced by the fungus. Furthermore, the decolorization of effluents can be carried out from 30°C to 60°C and at pH 3 to 6. The decolorization of various colored effluents occurs in the presence of sea water with 25 parts per thousand 20 salinity. Several synthetic dyes are also decolorized under similar conditions of temperature and pH by using free mycelia or immobilized fungus or extracellular culture fluids or extracellular polymeric substances.

Description of Prior Art

25 Some of the industries that discharge highly colored effluents are paper and pulp mills, textiles and dye-making industries, alcohol distilleries and leather industries. The paper and pulp industry is one of the major polluters, discharging various kinds of gaseous, liquid and solid wastes into the environment. Some of these pollutants are naturally occurring wood extracts such as tannins and lignins, others are xenobiotic compounds 30 that are formed during the paper making process such as chlorinated lignins and its degradation products and dioxins (Ali and Sreekrishnan, 2001, Aquatic toxicity from

pulp and paper mill effluents: a review. *Advances in Environmental Research* 5: 175-196). In the production of high-grade paper, residual lignin is chemically liberated from wood pulp through the use of chlorine bleaching. As a result, large volumes of intensely colored black liquors (BPEs) containing toxic chlorinated lignin degradation products, including chlorolignins, chlorophenols, chloroguiacols and chloroaliphatics are released into the environment (Reddy C.A. 1995. The potential for white-rot fungi in the treatment of pollutants. *Current Opinion in Biotechnology* 6:320-328). The primary contributor among these is the pulp black liquor which is intensely dark colored, toxic and contain high molecular weight modified and chlorinated lignins. Chlorinated organic compounds are acute or chronically toxic besides being mutagenic and carcinogenic.

Industrial dyes are released into the environment by dye-making and textiles industries. About 10 to 15 % of the total dye finds its way into the waste waters (see Rodriguez *et al.*, 1999. Industrial dye decolorization by laccases from ligninolytic fungi. *Current Microbiology* 38:27-32). Several of these dyes are stable to microbial attack and are thus recalcitrant. These can be transformed to carcinogenic compounds under anaerobic conditions (Chung and Stevens, 1992. The reduction of azo dyes by the intestinal microflora. *Critical Review in Microbiology* 18: 175-190). Azo dyes are structurally by far the most diverse. These fast colored dyes are a major source of concern to environmentalists since such pollutants, besides causing aesthetic damage to sites are also toxic and carcinogenic (Meyer, 1981. Biodegradation of synthetic organic colorants. *Federation of European Microbiological Society Symposium* 12:371-385). India, the former USSR, Eastern Europe, China, South Korea and Taiwan consume approximately 600 thousand tons (kt) of dyes per annum (Ishikawa *et al.*, 2000 *Chemical economics handbook: dyes*. Mento Park (CA): SRI Chemical and Health business Services). Asia is the largest dyestuff market today, contributing to about 42% of usage of the global market.

Distilleries producing beverage alcohol by fermentation use sugarcane molasses as the raw material. The effluents from such distilleries contain large amounts of dark brown pigments called molasses or melanoidin pigments (Wedzicha and Kaputo, 1992

Melanoidins from glucose and glycine: composition, characteristics and reactivity towards sulphite ion. Food Chemistry 43: 359-367). Melanoidin pigments (MP) are the products of the "Maillard reaction" between sugars and amino compound produced on heating (Fitzgibbon *et al.*, 1995. Biological treatment of distillery waste for pollution-remediation. Journal of Basic Microbiology 35: 293-301.). Pollution of aquatic ecosystems by molasses spent wash (MSW) is due to its intense brown color which cuts off light, prevents photosynthesis and causes anaerobic conditions. When MSW is dispersed in soil, it acidifies the soil and thereby affects agricultural crops (Agarwal and Pandey, 1994. Soil pollution by spent wash discharge: depletion of manganese(II) and impairment of its oxidation. Journal of Environmental Biology 15: 49-53).

Besides color, the various effluents from the above mentioned industries also contain various inorganic chemicals such as sulfides, sulfates, chlorides, carbonates, sodium hydroxide, peroxides and chlorine bleach compounds. The pH varies between 7 to 12. These chemicals may also add taste and odors (Bartlett, 1971. Public health Engineering-Design in metric waste water treatment. Applied Science Publishers, London).

Several physical and chemical processes for removal of color from paper and pulp mills have been studied. These include rapid filtration through soil, ultrafiltration, ion-exchange chromatography, lime precipitation and modified bleaching sequences such as peroxide addition during extraction, the replacement of chlorine by hypochlorite, sorption on hypo and alum-sludge, activated carbon and so on (Ali and Sreekrishanan, 2001). As most of these processes are cost prohibitive, they are not commercially viable (Prasad and Joyce, 1993. Sequential treatment of EI stage Kraft bleach plant effluent. Bioresources and Technology 44: 141-147).

After the conventional primary and secondary treatments, the colored effluents have reduced Biological Oxygen Demand (BOD) and Chemical Oxygen Demand (COD) but color removal is negligent and this is either achieved by diluting it with water or releasing it into soil without further treatment. A large quantity of water, which is a

precious commodity in certain parts of the world, is therefore wasted in treatment. Bureau of Industrial Costs and Prices have shown that Indian mills use 250-300 m³ of water to produce one ton of paper. Treatment normally consists of neutralization of excessive alkalinity together with an initial balancing and mixing of various liquors, followed by sedimentation with chemical coagulation and biological treatment. Anaerobic treatment is often used for dechlorinating chlorinated organic compounds, while concurrently removing BOD to produce methane gas. The effluent from an anaerobic process is discharged to the aerobic secondary treatment system for further quality improvement (Bartlett, 1971).

Several bacterial and microalgal cultures are reported as candidate organisms for bioremediation of various colored pollutants (Bajpai and Bajpai, 1994 Biological color removal of pulp and paper millwaste waters. *Journal of Biotechnology* 33: 211-220; Dilek *et al.*, 1999. Color and AOX removal from pulping effluents by algae. *Applied and Environmental Microbiology* 52: 585-591). These are used as inocula in bioreactors either as free cells or immobilized onto suitable substrates at various stages of effluent treatment. Biodegradation of the target compounds is also been tried in continuous flow reactors where the organism is immobilized on to membranes. In an another approach, indigenous microorganisms are used to biodegrade toxic compounds in contaminated sites. This is achieved by adding nutrients and oxygenating or aerating the contaminated sites to enhance the *in situ* bioremediation process (Pugh *et al.*, 1996 Bioremediation of contaminated soil and groundwater at a former solvent storage site. In: *Biotechnology in Industrial Waste Treatment and Bioremediation*. (eds. Hickey RF and Smith G). CRC Press Inc.:195-212).

The most efficient micro organisms to break down colored pollutants so far reported are white-rot fungi. These comprise mostly basidiomycetous fungi capable of extensive aerobic lignin degradation and mineralization. This is possible through several extra cellular lignin-degrading enzymes synthesized by these fungi. These enzymes lack substrate specificity and are thus capable of degrading a wide range of xenobiotics. Thus this invention relates to degradation of several such xenobiotic compounds in

colored effluents by the unidentified fungus NIOCC #2a deposited at the Institute of Microbial Technology, Chandigarh, India and having the accession No. MTCC 5159 can be made available to public after observing normal established procedures.

- 5 Normally, the colored pollutants are disposed after physical and chemical waste-minimization and biological treatments. Biological treatment includes biological pre-treatment with activated sludge of spent wash and treatment in stabilization ponds. Unfortunately, waste-water treatment facilities are often unable to completely remove the colored pigments from waste-waters and thus contribute to pollution of soil and
10 aquatic habitats. Most of these colored pollutants are proven to be toxic to aquatic animals.

A. Various organisms have been tried for decolorization of black liquor from paper and pulp mills.

- 15 A.1. A reference may be made to a publication wherein a white-rot fungus *Phanerochaete chrysosporium* removed as much as 98 % of the color from bleach plant effluent (BPE) within 10 days (Michel et al, 1991. Role of manganese peroxidases (MNP) and lignin peroxidases (LIP) of *Phanerochaete chrysosporium* in the decorization of kraft bleach plant effluent. Applied and Environmental Microbiology 57:2368-2375).
20 However, the bleach plant effluent was decolorized only on contact with the live fungal biomass.

- A.2. A reference may be made to a publication wherein another white-rot fungus *Tintoporia borbonica* removed 99% of the color of BPE in 4 days (Fukuzumi et al, 1977.
25 Decorization of kraft waste liquor with white-rot fungi. Screening of fungi and culturing conditionsvfor decolorization of kraft waste liquor. Mokuzai Gakkaishi 23: 290-298). However, no mention is made whether kraft waste liquor was decolorized in the absence of the fungal biomass.

- 30 A.3. A reference may be made to a publication wherein the white-rot fungus *Schizophyllum commune* removed 90% of the color during 2 days of incubation

(Belsare and Prasad, 1988. Decolorization of effluent from the bagasses-based pulp mills by white-rot fungus, *Schizophyllum commune*. Applied Microbiology and Biotechnology 28:301-304). Decolorization was achieved only when carbon and nitrogen sources were made available simultaneously in the medium where the fungus
5 was actively growing.

A.4. A reference may be made to a publication wherein a shake culture of *Trametes versicolor* was reported to remove up to 93% color from BPE in 2 days (Bajpai et al, 1993. Decolorization of Kraft bleach plant effluent with the white-rot fungus *Trametes versicolor*. Process in Biochemistry 28: 377-384.). Decolorization by culture
10 supernatant from the said fungus has not been reported in this case.

A.5. A reference may be made to a publication wherein a marine-related fungus *Flavodon flavus* removed about 75% of the color from BPE within 4 days and about
15 100% within 10 days (Raghukumar et al. 1996. Degradation of lignin and decolorization of paper mill bleach plant effluent (BPE) by marine fungi. Biotechnology Letters 18: 105-108). However, no decolorization of BPE was achieved using the culture supernatant.

A.6. A reference may be made to publications wherein fungi other than white-rot fungi
20 have been reported to decolorize BPE. Thus *Aspergillus niger* removed 80% of the color from BPE after 2 days (Kannan, 1990. Delorization of pulp and paper mill effluent by growth of *Aspergillus niger*. World Journal of Microbiology and Biotechnology 62:114-116.) and *Trichoderma* sp has been reported to remove about 85% of the color in BPE (Prasad and Joyce, 1991. Color removal from kraft bleach plant effluents by
25 *Trichoderma* sp. TAPPI Journal 74: 165-169). Decolorization using culture supernatant of exopolymeric substance by these fungi has not been illustrated.

B. Various organisms have been tried for decolorization of effluent from textile and dye-making industries and various synthetic dyes.

B.1. Reference may be made to a US patent wherein, living, dead, free, immobilized
30 white-rot fungi *Myrothecium* and *Ganoderma* sp. have been employed for adsorption,

dye degradation and color removal (US patent 5,091,089, "decolorization of dye-containing waste-water", 25.02.92). However, no reference has been made regarding decolorization of dyes using culture supernatants or exopolymeric substances.

B.2. A reference may be made to a US patent wherein white-rot fungus *Phanerochaete chrysosporium* and actinomycetes *Streptomyces* sp are used in degradation of xenobiotic azo dyes (US Patent 6,755,14, titled " Increasing biodegradability of xenobiotic azo dyes". 24.03.92). However, decolorization in the presence of sea water conditions and higher temperature have not been reported in this patent.

10 B.3. A reference may be made to a German patent (DD-290004, titled" Microbial breakdown of xenobiotic dyes of triphenylmethane series, 16.05.91) wherein, degradation of crystal violet and malachite green are brought about by oleophilic gram-positive bacteria preferably *Corynebacterium* sp. IMET 11347 or *Mycobacterium* sp. IMET 11349. The disadvantage of this system is that the organisms have to be grown at
15 32°C in 1% methanol and removal of bacterial inoculum from dye-containing waste-water is not very easy.

B.4. A reference may be made to a US patent (6,395,534, titled "White-rot-lignin-modifying fungus *Flavodon flavus* and a process for removing dye from dye-containing
20 water or soil using the fungus") wherein the said fungus when grown in the culture media prepared with sea water or distilled water decolorizes several synthetic dyes. However, the presence of fungus was required for decolorization of these dyes as the cell-free culture supernatant could not perform the same function.

B.5. A reference may be made to a patent (WO 03035561, titled "Sustainable process
25 for the treatment and detoxification of liquid waste") wherein several white-rot fungi have been reported to decolorize waste-waters containing dyes and effluent from paper and pulp mills. However, these fungi have not been reported to decolorize molasses spent wash.

30 B.6. A reference may be made to a publication (Fu and Viraraghavan, 2001, Fungal decolorization of dye wastewaters: a review. Bioresource Technology 79:251-262)

wherein the fungal biomass as biosorbents are shown to be an obvious choice for treatment of dye wastewaters. However, biosorption is only a pollution transfer since the xenobiotics are not destroyed but are only concentrated.

5 C. Various organisms have been tried for decolorization of effluent called molasses spent wash from alcohol distilleries containing melanoidin pigments.

C. 1. A reference may be made to a publication wherein filamentous fungi of the order Mycelia Sterilia were screened for decolorization of molasses pigments (Sirianuntapiboon, S; Somchai, P; Ohmomo, S. and P. Atthasampunna. 1988. Screening
10 of filamentous fungi having the ability to decolorize molasses pigments. Agriculture Biological Chemistry, 52:387-392). The maximum decolorization was achieved within 7-8 day culture.

C.2. A reference may be made to a publication wherein a thermophilic strain of
15 *Aspergillus fumigatus* G-2-6 was shown to decolorize molasses melanoidin to an extent of 75% at 45° within 3 days with shaking (Ohmomo, S; Kaneko,Y; Sirianuntapiboon, S.; Somchai, P; Atthasampunna, P and I. Nakamura. 1987. Decolorization of molasses waste-waters by a thermophilic strain, *Aspergillus fumigatus* G-2-6. Agriculture Biological Chemistry, 51:3339-3346). Culture-free supernatant has not been reported to
20 decolorize the melanoidins by this fungus.

C. 3. A reference may be made to a publication wherein *Artemia* larvae have been used for treatment of distillery waste and have shown to decrease B.O.D and C.O.D levels considerably. However, they do not help in decolorizing the molasses spent wash
25 (Rahaman, A. A., Ambika Devi, Sosamma M. E. and Prabhakar, J. 1992. Distillery effluent treatment using *Artemia*. Journal of Experimental Biology,30: 313-316).

C.4. A reference may be made to a publication wherein the melanoidins prepared from a glucose-glycine system are decolorized and degraded on ozone treatment. (Kim, S. B.
30 and Park Y.H. 1986. Decolorization and degradation products of melanoidin by active

oxygen. Bulletin of Korean Fisheries Society, 19:36-44. However, this process is expensive and not practical.

- 5 C. 5. A reference may be made to a US patent (6,613,559, titled "simultaneous decolorization and detoxification of molasses spent wash using novel white-rot-lignin-modifying fungus *Flavodon flavus*", 2.09.2003) wherein the fungus removed about 80% of the color from MSW within 9 days. However, the culture needs to be oxygenated with 100% oxygen for optimal performance by the fungus.

10 Comparison of NIOCC 2a with other cultures used for decolorization of dyes

ORGANISM	DYE	REFERENCE	DISADVANTAGES
<i>Myrothecium</i> and <i>Ganoderma</i> sp	Dye- containing waste-water	US patent 5,091,089, "decolorization of dye- containing waste-water", 25.02.92	However, no reference has been made regarding decolorization of dyes using culture supernatants or exopolymeric substances
<i>Phanerochaete</i> <i>chrysosporium</i> & actinomycetes <i>Streptomyces</i> sp	Xenobiotic azo dyes	US Patent 6,755,14, titled " Increasing biodegradability of xenobiotic azo dyes". 24.03.92	However, decolorization in the presence of sea water conditions and higher temperature have not been reported in this patent.
<i>Corynebacterium</i> sp. IMET 11347 or <i>Mycobacterium</i> sp. IMET 11349	Crystal violet and malachite green	German patent (DD-290004, titled "Microbial breakdown of xenobiotic dyes of triphenylmethane series, 16.05.91)	The disadvantage of this system is that the organisms have to be grown at 32°C in 1% methanol and removal of bacterial inoculum from dye-containing waste-water is not very easy.
<i>Flavodon flavus</i>	Several synthetic dyes.	US patent (6,395,534, titled "White-rot-lignin-modifying fungus <i>Flavodon flavus</i> and a process for removing dye	However, the presence of fungus was required for decolorization of these dyes as the cell-free culture supernatant could not perform the same function

		from dye-containing water or soil using the fungus")	
White-rot fungi	Waste-waters containing dyes and effluent from paper and pulp mills	A patent (WO 03035561, titled "Sustainable process for the treatment and detoxification of liquid waste")	However, these fungi have not been reported to decolorize molasses spent wash.
Fungal biomass	Dye waste waters	Fu and Viraraghavan, 2001	However, biosorption is only a pollution transfer since the xenobiotics are not destroyed but are only concentrated.

Comparison of NIOCC 2a with other cultures used for decolorization of molasses spent wash

ORGANISM	EFFLUENT	TIME REQD	PERCENT REMOVAL	REFERENCE	DISADVANTAGES
Filamentous fungi of the order Mycelia Sterilia	Molasses pigments	7-8 days		Sirianuntapiboon et al, 1988	However Culture-free supernatant has not been reported to decolorize the melanoidins by this fungus.
<i>Aspergillus fumigatus</i> G-2-6	Molasses melanoidin	3 days with shaking	75% / 45° C	Ohmomo, S et al 1987.	Culture-free supernatant has not been reported to decolorize the melanoidins by this fungus.

Artemia larvae	Distillery waste			Rahaman, A et al 1992	However, they do not help in decolorizing the molasses spent wash.
Ozone treatment	Melonoidins prepared from a glucose-glycine system			Kim et al 1986.	However, this process is expensive and not practical.
Flavodon flavus	Molasses Spent Wash	9 days.	80%	US patent (6,613,559, titled "simultaneous decolorization and detoxification of molasses spent wash using novel white-rot-lignin-modifying fungus <i>Flavodon flavus</i> ", 2.09.2003)	However, the culture needs to be oxygenated with 100% oxygen for optimal performance by the fungus.

Comparison of NIOCC 2a with other cultures used for decolorization of bleach plant effluent

ORGANISM	EFFLUENT	TIME REQD	PERCENT REMOVAL	REFERENCE	DISADVANTAGES
<i>Phanerochaete chrysosporium</i>	Bleach plant effluent (BPE)	10 days	98 %	Michel et al, 1991	However, the bleach plant effluent was decolorized only on contact with the live fungal biomass.

<i>Tintoporia borbonica</i>	Bleach plant effluent	4 days	99%	Fukuzumi et al, 1977	However, no mention is made whether kraft waste liquor was decolorized in the absence of the fungal biomass.
<i>Schizophyllum commune</i>	Bagasse-based pulp mill effluent	2 days	90%	Belsare and Prasad, 1988	Decolorization was achieved only when carbon and nitrogen sources were made available simultaneously in the medium where the fungus was actively growing.
<i>Trametes versicolor</i>	Bleach plant effluent	2 days	93%	Bajpai et al, 1993	Decolorization by culture supernatant from the said fungus has not been reported in this case.
Flavodon flavus	Paper bleach plant effluent	4 days - 10 days	75% - 100%	Raghukumar et al. 1996	However, no decolorization of BPE was achieved using the culture supernatant.
Aspergillus niger	Bleach plant effluent	2 days	80%	Kannan, 1990	Decolorization using culture supernatant of exopolymeric substance has not been illustrated.
Trichoderma sp	Bleach plant effluent		85%	Prasad and Joyce, 1991	Decolorization using culture supernatant of exopolymeric substance by these fungi has not been illustrated.

Thus, keeping in purview all what has been stated above and reported in the literature the inventors realized that there exists a need to develop a single process for the decolorization of a variety of colored effluents ranging from black liquor generate from Pulp & Paper industries, molasses spent wash from distilleries, textile dye waste-waters and synthetic dyes.

Objects of the Invention

An object of the present invention is to provide a novel process for decolorization of the brown pigments in black liquor, molasses spent wash and colored dye waters using the unidentified filamentous fungus NIOCC 2a for possible use in treatment of effluent from paper and pulp industries, alcohol distilleries, textile and dye-making industries and saline conditions which obviates drawbacks as detailed above. The said fungus can be efficiently utilized for the above mentioned usage under fresh water as well as estuarine conditions because of its tolerance to sea salts.

Another objective of the present invention is to provide a process for scaling up laccase production using inexpensive additives. The biomass of the fungus produced this way or the extracellular culture fluid or the extracellular polymeric substance (EPS) produced in the culture can be used for decolorization of black liquor, molasses spent wash, effluent from textile dye industries and synthetic dyes within 6-12 hours of incubation. The biomass of the fungus can also be immobilized on polyurethane foam cubes or sheets using conventional techniques used for immobilizing fungi and used for bioremediation of colored effluents.

Summary of Invention

Accordingly, the present invention provides a novel process for the decolorization of colored effluents, which comprises:

- a) culturing the yet unidentified, filamentous, non-sporulating fungus MTCC 5159 having the characteristics such as herein described in a conventional nutrient medium optionally prepared with sea water with salinity ranging from 25 to 35 parts per thousand optionally containing assimilable C and N source for a period of 6 to 12 days to obtain a fungal biomass;

- b) separating the fungal biomass from the culture medium of step [a] to obtain cell-free supernatant;
- c) freezing the cell-free supernatant obtained in step [b] for 12 to 24 hours followed by thawing thereof to obtain a precipitate containing the exopolymeric substance [EPS] and a supernatant;
- d) precipitating the remaining EPS from the supernatant obtained in step [c] with methanol;
- e) pooling and centrifuging the precipitates obtained in step [c] and [d] to obtain exopolymeric substance;
- f) contacting the colored effluents optionally in a diluted form either with the fungal biomass obtained in step [a] or cell-free supernatant obtained in step [b] or the exopolymeric substance as obtained in step [f] for a period ranging from 6 hours to 6 days at temperature ranging from 30 to 60 degree C and pH ranging from 3 to 6 to get decolorized water.

In an embodiment of the present invention, the carbon source for growing the fungus used is selected from glucose, fructose, sorbitol and starch, at 1% concentration.

In another embodiment of the present invention, the nitrogen source used for growing the fungus can be peptone or ammonium tartrate with the concentration of the nitrogen source for growing the fungus ranging from 0.02 to 0.2%.

In yet another embodiment of the present invention, the medium for growing the fungus is prepared with seawater having 25 parts per thousand salinity.

In still another embodiment of the present invention, the medium is optionally supplemented with 1% diluted textile mill effluent or copper sulphate at 2 mM concentration.

In another embodiment of the present invention, the age of the said fungal inoculum used is at least 6 days to get maximum decolorization of the effluents namely black liquor, molasses spent wash and textile dye wastewater.

- 5 In a further embodiment of the present invention, the fungal biomass can be immobilized on cubes or sheets of polyurethane foam or any other suitable matrix.

10 In still another embodiment of the present invention, the efficacy of the culture supernatant for decolorization may be increased by growing the culture in media containing inducers which may be dyes, phenolic compounds and effluents.

15 In an embodiment of the present invention, the exopolymeric substance (EPS) produced by the fungus at a minimum concentration of 1% (by weight) can be incubated with the above mentioned effluents for a minimum period of 6 hours to get decolorized effluents.

20 In yet another embodiment of the present invention, the colored effluents are selected from the group consisting of black liquor from paper and pulp industries, molasses spent wash from distilleries, textile dye waste-waters and synthetic dyes.

In still another embodiment of the present invention, the dilution of the colored effluents is done in the range of 10 to 20%.

25 In an another embodiment of the present invention, the contacting of the colored effluents with fungal biomass is carried out for a period of 2 to 6 days at a temperature of about 30 degrees C and pH of about 6.0.

30 In a further embodiment of the present invention, the contacting of the colored effluents with the cell-free supernatant is carried out for a period of about 12 hours at a temperature of about 60 degree C and pH of about 6.0.

In still another embodiment of the present invention, the contacting of the colored effluents with the exopolymeric substance is carried out for a period of about 24 hours at a temperature of about 60 degree C and pH of about 6.0.

- 5 In yet another embodiment of the present invention, the separation of the fungal biomass from the culture medium is carried out by vacuum filtration or centrifugation.

Brief Description of the Drawings

- 10 **Figure 1a** illustrates growth of the fungus NIOCC 2a in Boyd and Kohlmeyer's medium containing natural carbon and nitrogen source and prepared with sea water of various salinities according to several embodiments of the present invention. **Figure 1b** illustrates production of laccase enzyme by this fungus at various salinities according to several embodiments of the present invention.


- 15 **Figures 2a and 2b** illustrates decolorization of several synthetic dyes by the fungus according to a variety of embodiments of the present invention. **Figure 2c** illustrates decolorization of black liquor used at 10 and 20% concentrations according to a variety of embodiments of the present invention. 10 ml of beach plant effluent with 90 ml of the culture medium (this gives 10% final concentration), similarly 20 ml of beach plant effluent with 80 ml of the culture medium (this gives 20% final concentration) prepared in seawater of 25 parts per thousand salinity was used for this experiment. The values represent percentage residual color in the medium on respective days. **Figure 2d** illustrates decolorization of molasses spent wash used at 10 and 20% concentrations by NIOCC 2a according to various embodiments of the present invention. **Figure 2e** illustrates decolorization of textile mill effluents collected at various stages namely A and B used at 10 and 20% concentrations according to embodiments of the present invention.

- 30 **Fig 3a, 3b** illustrates activity of laccase at different pH and temperatures respectively according to an embodiment of the present invention.

Detailed description of the Invention

The organism used in the present invention is an unidentified non sporulating filamentous fungus isolated from mangrove wood, from a coastal marine environment.

- 5 The said fungus can be grown in a modified Boyd & Kohlmeyer (B&K) medium containing 1% glucose, 0.2% peptone, 0.1% yeast extract and 1.8% agar dissolved in 25 ppt sea water. The fungal mat grown this way may be macerated and used as starter inoculum for the experimental cultures in B&K medium prepared in 25 ppt sea water. The conventional media can be natural or synthetic media containing carbon, nitrogen
- 10 sources and inducers to increase the production of extra cellular lignin degrading enzymes in the culture medium. The said fungus can also be immobilized in polyethylene foam or any other suitable material and used for color removal from various colored effluents. The said fungus MTCC 5159 produces lignin-modifying enzyme laccase bearing the International Enzyme Commission number E.C. 1.10.3.2
- 15 when grown in conventional media prepared with sea water. By virtue of the lignin-modifying enzyme laccase which break down a broad range of xenobiotics, this fungus is useful in degradation of a wide range of heterocyclic azo and polymeric dyes besides other industrial colored pollutants.
- 20 The final and conclusive identification of a fungus up to species level is based on the characteristics exhibited by the fungus in its sexual stage (sporulation stage). The fungus NIOCC 2a is a fungus whose sporulating stage has not yet been identified even though it has been grown in special media meant to induce sporulation. It has been identified up to class level using molecular taxonomy techniques. Below is a portion of
- 25 the ribosomal DNA (rDNA) of NIOCC 2a i.e the Internally transcribed spacer region (ITS) 2 and 5.8 rDNA has been sequenced and aligned with the rDNA of other known fungi whose sequences are submitted at the gene bank databases. The fungus was isolated from decaying mangrove wood incubated in moist chamber.

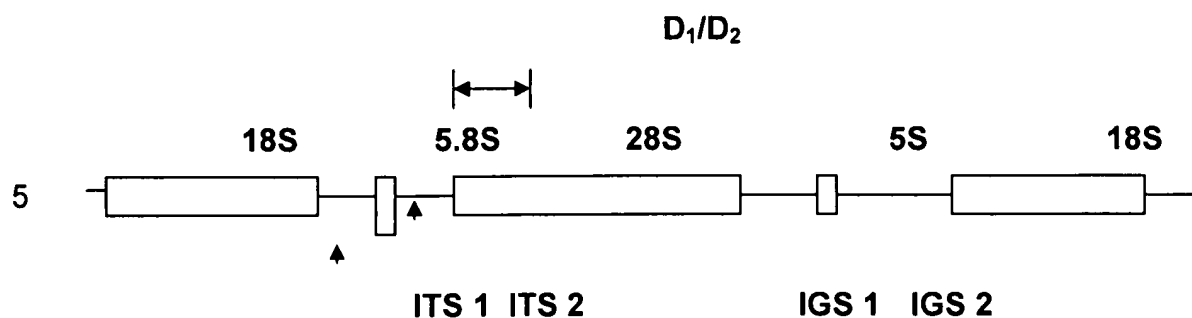

10 **Schematic representation of the Fungal rRNA gene;** ITS (internal transcribed spacer), IGS (intergenic spacer) and D₁/D₂ (domains 1 & 2)

FINAL SUBMITTED SEQUENCE USING ITS1& ITS4 (FORWARD & REVERSE)
PRIMER (shows degeneracy at 3 positions out of the 500 nucleotides sequenced)

15 5'GGCCCCAACCGGGCATGTGCACATTCTGTTTCATTCCATTCTCATACACCTCTGTG
 CACTTTACATAGGTTTGGTATAGAAAAGGTCTTTATTGACTTTGGAAATACTGACCT
 ATGCTTTTACAAACGCTTCAGTTTTAGAATGTCATCCGCGTATAACGCAA■AAATAC
 AACTTTCAGCAACGGATCTCTTGGCTCTCGCATCGATGAAGAACGCAGCGAAATGC
 GATAAGTAATGTGAATTGCAGAATTGAGTGAATCATC■AATCTTTGAACGCATCTTG
 20 CGCCCTTTGGTATTCCGAA■GGCATGCCTGTTTGAGTGTGCATGGTATTCTCAATAC
 CCCAAATCTTTGCGGATAAGGGTGTGTTGGACTTGGAGGTTTTTGCAGGTAATGAT
 TGTATTACCAGCTCCTCTTAAATGCATTAGCAGAGATAATACTGCTACTCTCCAGTG
 TGATAATTGTCTACACTGTTAGTAGTGCGGTATAACAAAATGTCTATGC 3'

25 **Key :** S = C/G
 R = A/G
 D = T/G

30 Upon blasting with gene bank (NCBI), the sequence of NIOCC #2a (MTCC 5159) was found to closely resemble a basidiomycetous fungus. However, it is yet to be identified. The sequence was allotted the accession number AY939879.

From the above results NIOCC 2a is considered to be a basidiomycete, this is supported by white fluffy mycelial growth which is characteristic of white rot or basidiomycetous fungi.

5

Black liquor is dark brown in color and after decolorization by the fungus MTCC 5159, it turns light brown after 6 days. Similarly molasses spent wash is dark brown and turns straw color after 6 days. Textile effluents A, originally magenta in color was comparatively difficult to decolorize whereas Textile effluent B, originally bottle green in color was comparatively easy to decolorize to a light green color after 6 days.

10

The process for the decolorization of various effluents utilizing the fungal biomass involves addition of sterilized, appropriately diluted effluents to a 6 day-old culture of NIOCC 2a growing in B&K medium. The degradation of effluents and various dyes is monitored spectrophotometrically by removing an aliquot of sample from these cultures and measuring changes in absorbance at appropriate wavelengths. The decolorization is measured every alternate day up to 6 days. Heat-killed cultures serve as controls where none to very low decolorization takes place due to adsorption.

15

The process of decolorization of various dyes and effluents using the cell-free supernatant involves addition of filter sterilized culture supernatant of the said fungus grown in the presence of various dyes, inducers and dilute effluents. The decolorization of the effluents was monitored spectrophotometrically at appropriate wavelengths up to 12 hours. The uninoculated culture medium containing these dyes served as control.

20

The process of decolorization of effluents using the exopolymeric substance (EPS) produced by the fungus is carried out using separated and freeze dried EPS. A known amount of EPS is incubated with appropriately diluted effluents for a period of 6 to 12 hours. The decolorization is monitored in the supernatant after centrifugation. While using the EPS, about 10 mg of EPS (dry weight) is contacted with 3 ml of effluent having the final concentration of 10%.

25

30

The induction of the lignin modifying enzyme, laccase in the culture supernatant of the said fungus can be done by the addition of various inducers in the form of dyes, phenolic compounds and diluted effluents. The range of inducers added were from 0.01 to 0.05 % at the final concentration (This is calculated from the mM concentrations added to the fungal cultures, as given in the example 2)

The said fungus MTCC 5159 is capable of growing and producing the lignin modifying enzyme laccase in the presence of seawater. The decolorization of various dyes and effluents also takes place in the presence of seawater. The effluents discharged generally have a temperature of 50° to 60° C. Most of the industrial effluents from textiles, dye stuff, paper and pulp industries and alcohol distilleries contain chromogenic substances as well as high concentrations of salts especially chlorides and sulphates (Barlett, 1971). In light of this, salt tolerant organisms with enzymes active at high temperatures are best suited for such wastewater treatments. Most of the fungi used for bioremediation of such colored wastewaters do not possess salt tolerance nor do they posses enzyme laccase acting at high temperature. In view of this the present process has an advantage over the conventional processes referred to in various patents and publications discussed above. Additionally we are reporting decolorization of BPE, MSW and textile dye wastewaters as well as synthetic dyes by the same fungus namely NIOCC 2a.

The lignin modifying enzyme laccase has a broad substrate specificity and thus able to oxidize several environmental pollutants. The laccase production by the said fungus is enhanced by various additives to the conventional natural medium prepared with seawater.

EXAMPLES

The following examples are included to demonstrate particular embodiments of the invention. It should be appreciated by those of skill in the art that the techniques disclosed in the examples which follow represent techniques discovered by the inventors to function well in the practice of the invention, and thus can be considered to constitute preferred modes for its practice. However, those of skill in the art should, in light of the present disclosure, appreciate that many changes can be made in the specific embodiments which are disclosed and still obtain a like or similar result without departing from the spirit and scope of the invention.

Example 1

The growth of MTCC 5159 was determined in liquid medium containing 1% glucose, 0.2% peptone and 0.1% yeast extract (hereafter called B & K medium) dissolved in sea water varying in salinity from 0 to 34 ppt and pH of 7.0. The culture was harvested in triplicates on the days 3, 6, 9, 12 and 15, rinsed in distilled water and then filtered through dried, pre-weighed GF/C filter papers and dried to a constant weight. The difference in weight was expressed as mg dry weight. Accordingly Fig 1a shows that the maximum biomass is produced in medium prepared in 34 ppt seawater on day 9. The laccase activity in the culture supernatant was measured using 2 mM ABTS prepared in 100 mM glycine-HCl buffer (pH 3) at 405 nm spectrophotometrically as a function of time. Accordingly Fig 1b shows that the maximum laccase production in medium prepared with 25 ppt seawater on day 12.

Example 2

In order to enhance the laccase production by MTCC 5159 various inducers were added to a 3 day old culture grown in B&K medium prepared in 25 ppt sea water having a pH of 7.0. The inducers such as *p*-anisidine, catechol, guaiacol, ferulic acid, vanillic acid, veratryl alcohol and 2,5 dimethyl aniline were used at a final concentration of 1 mM. Copper sulphate at a concentration of 2mM, indulin at 0.25 % and a combination of 2 mM copper sulphate and 1 mM guaiacol were used. The laccase activity in the culture

supernatant was measured at an interval of 3 days up to 21 days as described in Example 1.

- 5 Dyes which are generally used for decolorization were also tested for their laccase induction properties. Trypan blue, aniline blue and remazol brilliant blue R at a final concentration of 0.04%, methylene blue, crystal violet, brilliant green and congo red at 0.02% and reactive orange 176 at 0.015% final concentration were added to B & K medium prepared in 25 ppt sea water having the pH of 7.0. The effluents were also tested for their effect on enhancing the synthesis of laccase.
- 10 Effluents contain a variety of compounds, which include phenolics as well as dyes, hence the effluent not only act as a substrate for laccase but also enhance its production by acting as an inducer. Effluents like textile effluent A and textile effluent B as well as molasses spent wash (MSW) and black liquor were also screened for their laccase inducing properties, each at 1,10 and 20 percentage concentrations. They were
- 15 added to B & K medium prepared in 25 ppt sea water having the pH of 7.0. The laccase activity in the culture supernatant was measured using 2 mM ABTS prepared in 100 mM glycine-HCl buffer (pH 3) at 405 nm spectrophotometrically as a function of time.

TABLE 1a: INDUCERS FOR ENHANCEMENT OF LACCASE PRODUCTION BY NIOCC 2a

LACCASE ACTIVITY (U L⁻¹)							
INDUCER	DAYS						
	3	6	9	12	15	18	21
B & K medium (control)	0	0	404	166	158	921	838
<i>p</i> -Anisidine (1mM)	73	92	32	35	24	1200	1351
Catechol (1mM)	21	36	53	27	27	1246	1675
Copper sulphate (2mM)	16	197	185	119	36571	42933	83619
Guaiacol (1mM)	0	85	979	384	344	1258	21112
Copper sulphate (2mM) & Guaiacol (1mM)	36	485	14078	21347	44457	45257	46781
Ferulic Acid (1mM)	9	70	7502	1407	1755	873	780
Indulin (0.25%)	0	63	79	66	62	894	1174
Vanillic acid (1mM)	75	265	68	48	32	1599	1359
Veratryl alcohol (1mM)	14	112	768	395	332	1889	1931
2,5 dimethyl aniline (1mM)	0	232	133	177	128	548	633

TABLE 1b: DYES AS INDUCERS FOR ENHANCEMENT OF LACCASE PRODUCTION

LACCASE ACTIVITY (UL ⁻¹)								
INDUCER	DAYS							
	3	6	8	10	12	14	16	18
Trypan Blue (0.04%)	21	1	149	747	844	897	812	505
Aniline Blue (0.04%)	12	67	21	825	1051	1166	1211	1048
Methylene Blue (0.02%)	0	51	93	634	783	651	656	666
RBBR (0.04%)	3	43	0	0	0	0	0	0
Crystal Violet (0.02%)	4	104	0	581	825	819	671	745
Brilliant Green (0.02%)	13	53	0	1852	1821	2271	2191	2156
Poly R (0.02%)	17	36	0	187	248	241	266	325
Congo Red (0.02%)	5	5	115	955	966	1363	1389	1241
RO 176 (0.015%)	21	8	335	949	904	1158	1108	1180

TABLE 1 c: EFFLUENTS AS INDUCERS FOR ENHANCEMENT OF LACCASE PRODUCTION

5

LACCASE ACTIVITY (UL ⁻¹)							
INDUCERS	DAYS						
	3	6	9	12	15	18	21
Textile effluent A (1%)	25	113	937	440	404	2036	1886
Textile effluent B (1%)	7	358	4545	85829	19086	42248	266
MSW (1%)	0	159	1566	563	505	1756	2075
Black Liquor (1%)	2	139	738	296	268	1299	1156

TABLE 1d: EFFLUENTS AS INDUCERS FOR ENHANCEMENT OF LACCASE PRODUCTION

LACCASE ACTIVITY (UL⁻¹)								
INDUCER	DAYS							
	3	6	8	10	12	14	16	18
Text Effluent A (10%)	0	1	42	275	226	251	352	250
Text Effluent A (20%)	0	3	334	387	225	1400	426	354
Text Effluent B (10%)	21	29	588	1191	1061	1283	1478	763
Text Effluent B (20%)	0	8	931	968	738	592	1003	1087
MSW (10%)	0	46	100	187	105	117	157	188
MSW (20%)	0	22	94	176	115	198	186	230
Black Liquor (10%)	0	0	230	270	235	256	246	237
Black Liquor (20%)	6	44	68	85	89	128	173	110

Accordingly, Table 1a shows copper sulphate is the best inducer. Among the dyes, Table 1b shows that brilliant green induced maximum laccase production on day 14. Among the effluents, Table 1c shows that textile effluent B at 1% concentration induced maximum laccase production on day 12. When these effluents were used at 10 and 20% concentrations there was an inhibitory effect. However textile effluent B was still the best.

Example 3

The fungus MTCC 5159 was tested for its ability to decolorize various dyes and effluents by monitoring the change in its specific absorbance maxima every alternate day over a period of 6 days after the dye/ effluents were added. The dye was added to a six day old culture growing in the B & K medium as described above and the time of addition was considered to be the 0 day. The final concentration of the dye in the medium on day zero (immediately after adding) was considered to be 100%. The extent of decolorization was recorded as residual color (in percentage). Trypan blue, aniline blue, remazol brilliant blue R, methylene blue, crystal violet, brilliant green, congo red

and reactive orange 176 (concentration as mentioned in the Table 1b) were monitored at their absorbance maxima in B&K medium which were 599, 585, 597, 663, 589, 623, 486 and 499 nm respectively. Effluents like textile effluent A, B, MSW and black liquor were also monitored at their absorbance maxima in B&K medium, at 505, 663, 663 and 5 317nm respectively.

Accordingly, among the dyes tested Fig 2a indicates that brilliant green was almost totally decolorized by day 4. Most of the dyes were decolorized by 50 – 60 % on day 6. Reactive orange 176 (RO 176) was least degraded followed by Poly R 478. Figure 2b 10 indicates that most of the synthetic blue dyes were decolorized by 50-90 % by day 6. Fig 2c indicates that black liquor used at a concentration of 20%, lost about 80% of its color by day 6 whereas when used at 10% concentration about 50% of the color was removed. Regarding the decreased decolorization with decreasing concentration of black liquor we hypothesize that some low molecular weight compounds which act as 15 mediators in laccase-catalyzed decolorization of effluents. Therefore, when we use lower concentration of the black liquor their concentration also is reduced and thus the decolorization percentage is also subsequently reduced.

Fig 2d indicates that molasses spent wash was totally decolorized by day 6 when used 20 either at 10 or 20% concentration. Fig 2e indicates that textile effluent B was decolorized to a greater extent than textile effluent A. This trend was visible at both the concentrations.

Example 4

25 NIOCC 2a was grown in B&K medium prepared in sea water of 25 ppt salinity (the pH of the medium being 7.0) for 6 days. It was supplemented with 1% textile effluent B on day 6. The culture supernatant on day 12 was collected and concentrated two-fold. The concentrated enzyme was incubated with various dyes used at concentrations as given in Example 2 and the effluents were used at 10% only. The decolorization was 30 monitored at 6 and 12 hours by incubating the samples in a water bath at 60°C and pH

6.0 The absorbance maxima specific to that particular dye/ effluent was monitored for 6 to 12 hours.

TABLE 2a: DECOLORIZATION OF DYES USING CULTURE SUPERNATANT OF NIOCC 2a

PERCENT DECOLORIZATION		
DYE	HOURS	
	6	12
Trypan Blue (0.04%)	22	25
Aniline Blue (0.04%)	55	40
Methylene Blue (0.02%)	3	5
RBBR (0.04%)	67	46
Crystal Violet (0.02%)	44	54
Brilliant Green (0.02%)	72	79
Poly R (0.02%)	21	43
Congo Red (0.02%)	54	47

TABLE 2b: DECOLORIZATION OF EFFLUENTS USING CULTURE SUPERNATANT OF NIOCC 2a

PERCENT DECOLORIZATION		
EFFLUENT	HOURS	
	6	12
Textile effluent A (10%)	9	11
Textile effluent B (10%)	14	22
MSW (10%)	34	33
Black Liquor (10%)	71	59

Accordingly, as indicated in Table 2a, brilliant green was decolorized by almost 80% after 12 hours incubation with the enzyme. Among the effluents, as indicated in Table 2b, black liquor was decolorized by 70% after 6 hours however by 12 hours, the color increased due to re-polymerization. This problem could be solved by using appropriate mediators. The decolorization efficiency of the enzyme could be increased by increasing the concentration of the enzyme.

Example 5

The temperature and pH optima of laccase activity were estimated to obtain maximum efficiency in detection of laccase. Laccase activity was estimated from pH 3 to 11. To obtain pH 3, glycine-HCl buffer was used, acetate buffer for pH 4 and 5, phosphate buffer for pH 5, 6 and 7. For pH 8 and 9, glycine-NaOH buffer and for pH 11 carbonate-bicarbonate buffers were used. The activity of laccase was tested from 5° to 90°C. Temperature was maintained using an electrically controlled cell holder of Shimadzu spectrophotometer (UV-2450) with enzyme kinetics software. Accordingly, the optimum pH for laccase activity was at pH 6 as shown in Fig 3a and the optimum temperature was 60°C as indicated in Fig 3b.

Example 6

The exopolymeric substance (EPS) of the fungus NIOCC 2a was prepared as follows: 1 litre of a 12 day old culture filtrate was frozen for 12 to 24 hours and allowed to thaw. The EPS precipitated on thawing and was removed by decantation. Methanol at a final concentration of 70% was added to the supernatant to further precipitate the remaining EPS from the culture supernatant. The precipitated EPS was collected by centrifugation and the pooled precipitate was lyophilized. To 10 mg of this EPS, various dyes and effluents were added at concentrations as given in example 2 and incubated at 60°C with phosphate buffer at pH 6. The decolorization was monitored at 6 and 12 hours at the absorbance maxima specific to that particular dye/ effluent. Accordingly, Table 3a indicates that most of the dyes showed 75-100% decolorization by 24 hours. Methylene blue and congo red were not decolorized to these extents.

TABLE 3 a: DECOLORIZATION OF DYES USING EXOPLOYMERIC SUBSTANCE PRODUCED BY NIOCC 2a

<u>PERCENT DECOLORIZATION</u>		
DYE	Hours	
	12	24
Trypan blue (0.04%)	20	79
Aniline blue (0.04%)	46	75
Methylene blue (0.02%)	4	6
RBBR (0.04%)	19	100
Crystal violet (0.02%)	45	80
Brilliant green (0.02%)	2	90
Poly R 478 (0.02%)	33	90
Congo red (0.02%)	18	29
RO 176 (0.015%)	35	100

5 TABLE 3b: DECOLORIZATION OF EFFLUENTS USING EXOPLOYMERIC SUBSTANCE PRODUCED BY NIOCC 2a

<u>PERCENT DECOLORIZATION</u>		
EFFLUENT	Hours	
	12	24
Text effluent A (10%)	11	100
Text effluent A (20%)	15	62
Text effluent B (10%)	35	100
Text effluent B (20%)	3	100
MSW (10%)	12	100
MSW (20%)	2	100

Black Liquor (10%)	41	100
Black Liquor (20%)	51	100

Accordingly, table 3b indicates that most of the effluents showed 100% decolorization by 24 hours with the exception of textile effluent A when used at a final concentration of 20% which showed about 60% decolorization. Exopolymeric substance produced by the fungus appears as large amorphous crystals around the fungal hyphae and they stain blue with acidic alcian blue. About 2.3gms of EPS (dry weight) was obtained per litre of culture filtrate. The solubility of the EPS in different solvents show that EPS is soluble only in 1N HCl, H₂SO₄ and 10 % EDTA (Table 4). The carbon, nitrogen and sulfur ratio, (of the EPS produced when the fungus was grown in 1% glucose with a Boyd and Kholmeyer medium base) was analysed in the CNS analyzer (Model NCS 2500/S.no.9808136, Thermoquest Italia, S.P.A.) using MAG-1 and sulphur standards. The CNS ratio was 4.5 : 0.76 : 10. Thus the EPS appears to be a sulphated polysaccharide.

TABLE 4: Solubility of EPS in different solvents

S.No.	SOLVENT	SOLUBILITY
1	Distilled water	Not Soluble
2	Distilled water, on boiling	Not Soluble
3	1N HCl	Soluble
4	H ₂ SO ₄	Soluble after addition
5	CHCl ₃	Not Soluble
6	DMSO (Me ₂ SO)	Not Soluble
7	10 % EDTA	Soluble after 12 hours
8	5 % EDTA	Not Soluble
9	2.5 % EDTA	Not Soluble
10	1N NaOH	Not Soluble

The main advantages of the present invention are:

1. The fungus NIOCC 2a (MTCC 5159) in one embodiment, may be grown on a large scale in simple nutrient medium containing peptone yeast extract and glucose in seawater of 25-35 parts per thousand salinity.
2. In another embodiment, the production of laccase by the fungus of the present invention may be enhanced by incorporating dilute (~1 %) textile dye in the above medium. Under these conditions the laccase activity is approximately 86000 U L⁻¹.
3. In one particular embodiment, the optimum temperature for the laccase activity is at 60°C and the optimum pH for its activity is 6.0.
4. In another particular embodiment, the said fungus decolorizes about 80% of the color in black liquor added to the culture medium at 20% dilution by day 6. By day 2 about 50% of the color is removed.
5. In yet another particular embodiment, molasses spent wash appears totally decolorized by day 6 when added to the culture medium at 10 and 20% concentrations.
6. In another particular embodiment, the fungus of the present invention decolorizes textile mill effluents by 50% on day 2 when added to the culture medium at 10 and 20% concentrations.
7. The fungus of the present invention may also decolorize several synthetic dyes in the culture medium to varying extents within 6 days.
8. The fungal biomass-free- culture supernatant of the present invention, in a particular embodiment, may also decolorize all the above mentioned colored pollutants efficiently within 12 h of incubation at 50°C and pH 6.0.
9. In yet another particular embodiment, the exopolymeric substance (EPS) produced by the fungus of the present invention, upon incubation with colored effluents may decolorize all the above mentioned colored effluents within 24 hours.

All of the COMPOSITIONS, METHODS and APPARATUS disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While the compositions and methods of this invention have been described in terms of preferred embodiments, it will be apparent to those of skill in the art that

5 variations may be applied to the COMPOSITIONS, METHODS and APPARATUS and in the steps or in the sequence of steps of the methods described herein without departing from the concept, spirit and scope of the invention. More specifically, it will be apparent that certain agents that are both chemically and physiologically related may be substituted for the agents described herein while the same or similar results would be

10 achieved. All such similar substitutes and modifications apparent to those skilled in the art are deemed to be within the spirit, scope and concept of the invention as defined by the appended claims.

We claim:

1. A process for the decolorization of colored effluents, which comprises:

- 5 a) culturing a filamentous, non-sporulating fungus bearing MTCC deposit number 5159 in a conventional nutrient medium prepared with water selected from the group consisting of fresh water and salt water with salinity ranging from 25 to 35 parts per thousand for a period of 6 to 12 days to obtain a fungal biomass;
- 10 b) separating the fungal biomass from the culture medium of step [a] to obtain cell-free supernatant;
- 15 c) freezing the cell-free supernatant obtained in step [b] for 12 to 24 hours followed by thawing thereof to obtain a precipitate containing an exopolymeric substance [EPS] and a supernatant;
- 20 d) precipitating any remaining EPS from the supernatant obtained in step [c] with methanol;
- 25 e) pooling and centrifuging the precipitates obtained in step [c] and [d] to obtain exopolymeric substance; and
- f) contacting the colored effluents with a composition selected from the group consisting of the fungal biomass obtained in step [a], the cell-free supernatant obtained in step [b], and the exopolymeric substance as obtained in step [e] for a period ranging from 6 hours to 6 days at temperature ranging from 30 to 60 degrees C and pH ranging from 3 to 6.

2. A process as claimed in claim 1, wherein the colored effluents are selected from the group consisting of black liquor from paper and pulp industries, molasses spent wash from distilleries, textile dye waste-waters and synthetic dyes.

5 3. A process as claimed in claim 1, wherein the fungal biomass is cultured for at least 6 days.

10 4. A process as claimed in claim 1, wherein the nutrient medium further contains a nutrient source selected from the group consisting of assimilable carbon and assimilable nitrogen.

15 5. A process as claimed in claim 4, wherein the carbon source used for growing the fungus is selected from the group consisting of glucose, fructose, sorbitol and starch.

6. A process as claimed in claim 4, wherein the concentration of the carbon source for growing the fungus is at least 1%.

20 7. A process as claimed in claim 4, wherein the nitrogen source used for growing the fungus is selected from the group consisting of peptone and ammonium tartarate.

8. A process as claimed in claim 4, wherein the concentration of the nitrogen source for growing the fungus is at least 0.02%.

25 9. A process as claimed in claim 1, wherein the medium for growing the fungus is prepared with salt water having 25 parts per thousand salinity.

30 10. A process as claimed in claim 1, wherein the medium is optionally supplemented with 1% diluted textile mill effluent or copper sulphate at 2 mM concentration.

11. A process as claimed in claim 1, wherein the fungal biomass is cultured for a period of at least 6 days.

5 12. A process as claimed in claim 1, wherein the dilution of the colored effluents is done in the range of 10 to 20%.

10 13. A process as claimed in claim 1, wherein contacting of the colored effluents with fungal biomass is carried out for a period of 2 to 6 days at a temperature of about 30 degrees C and pH of about 6.0.

14. A process as claimed in claim 1, wherein contacting of the colored effluents with the cell-free supernatant is carried out for a period of about 12 hours at a temperature of about 60 degrees C and pH of about 6.0.

15 15. A process as claimed in claim 1, wherein contacting of the colored effluents with the exopolymeric substance is carried out for a period of about 24 hours at a temperature of about 60 degrees C and pH of about 6.0.

20 16. A process as claimed in claim 1, wherein separation of the fungal biomass from the culture medium is carried out by vacuum filtration or centrifugation.

17. A process as claimed in claim 1, wherein the fungal biomass is immobilized.

25 18. A process as claimed in claim 17, wherein the fungal biomass is immobilized on cubes or sheets of polyurethane foam.

30 19. An exopolymeric substance from fungal strain MTCC 5159 that decolorizes a colored effluent when contacted with said colored effluent for a period ranging from 6 hours to 6 days at temperature ranging from 30 to 60 degrees C and pH ranging from 3 to 6.

Abstract

The present invention relates to a novel process for decolorization of colored effluents. More particularly it relates to a process for decolorization of colored effluents of textile mills, dye-making industries, paper and pulp industries and molasses spent wash from alcohol distilleries using an unidentified marine fungus NIOCC #2a isolated from mangrove wood and deposited in the microbial type culture collection (MTCC) of the Institute of Microbial Technology, Chandigarh, India, under the accession number MTCC 5159. Further, this invention relates to decolorization of these effluents using the fungus directly, its cell-free culture supernatant or immobilized fungus or extracellular polymeric substances produced by the fungus. Furthermore, the decolorization of effluents can be carried out from 30°C to 60°C and at pH 3 to 6. The decolorization of various colored effluents occurs in the presence of sea water with 25 parts per thousand salinity. Besides, several synthetic dyes are also decolorized under similar conditions of temperature and pH by using free mycelia or immobilized fungus or extracellular culture fluids or extracellular polymeric substances.

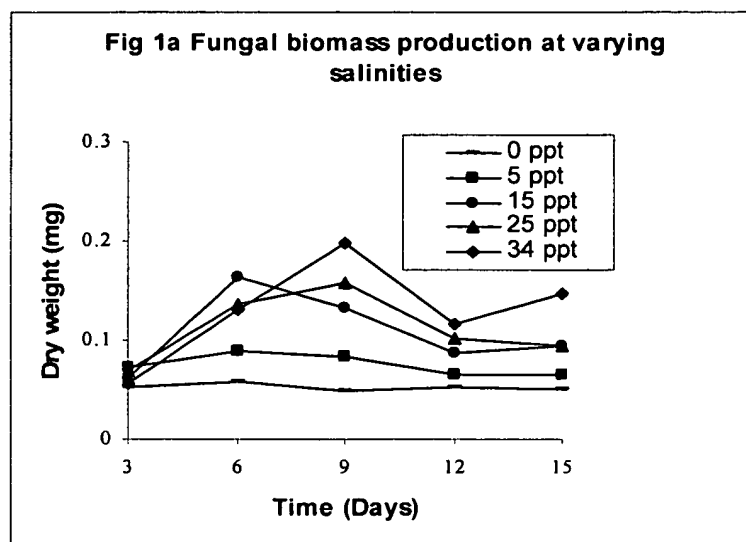


Fig 1a Fungal biomass production at varying salinities

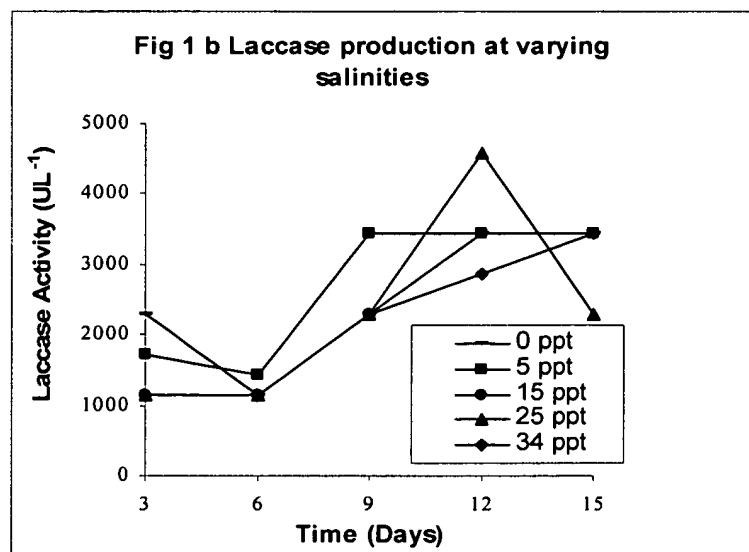


Fig 1b Fungal Laccase production at varying salinities

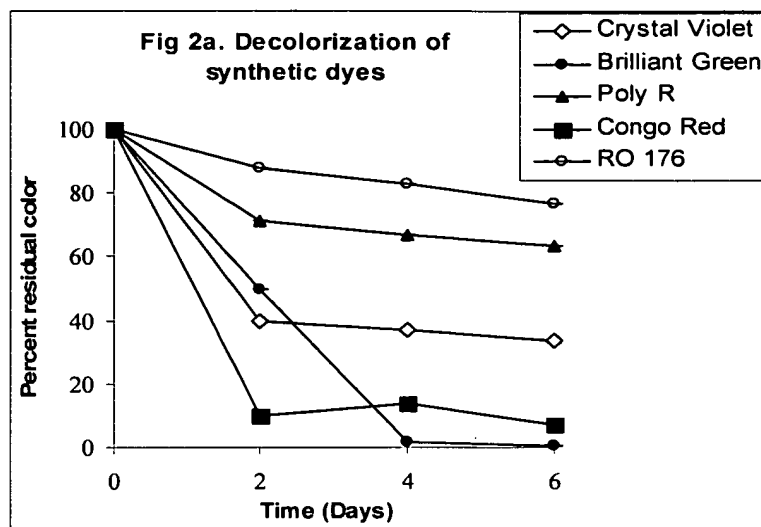


Fig 2a Decolorization of synthetic dyes

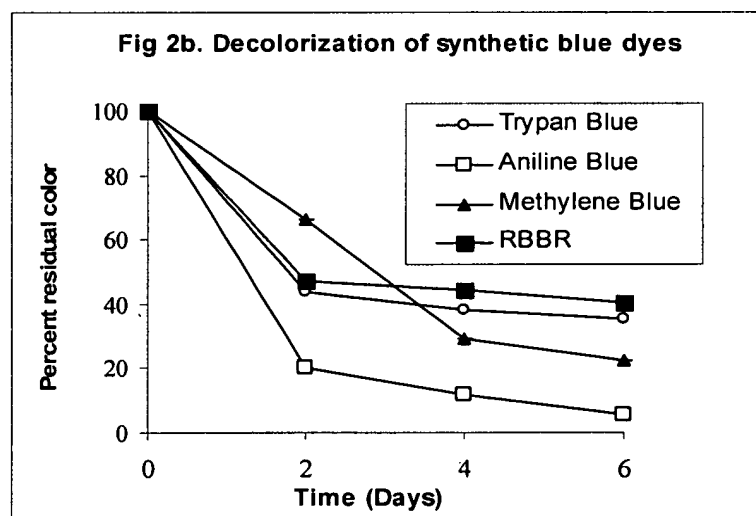


Fig 2b Decolorization of synthetic blue dyes

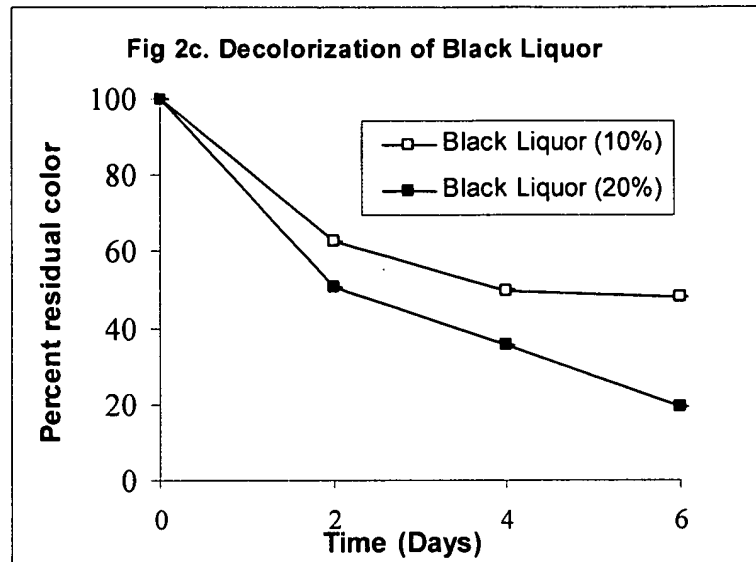


Fig 2c Decolorization of Black Liquor

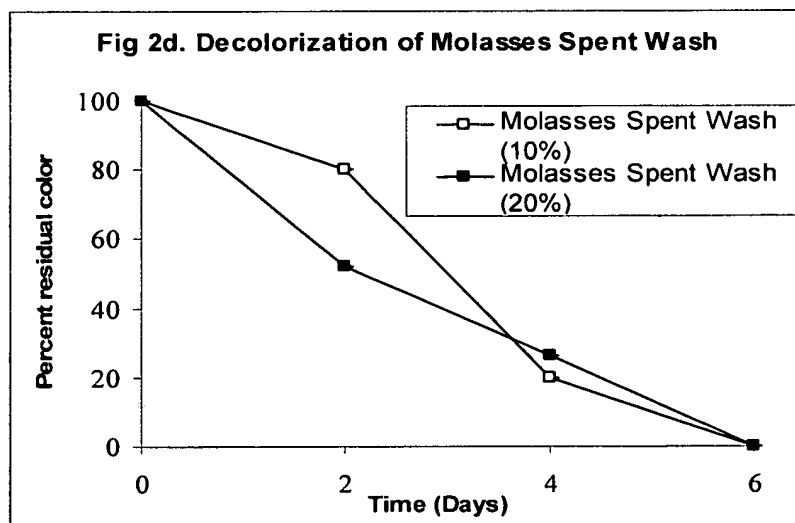


Fig 2d. Decolorization of Molasses Spent Wash

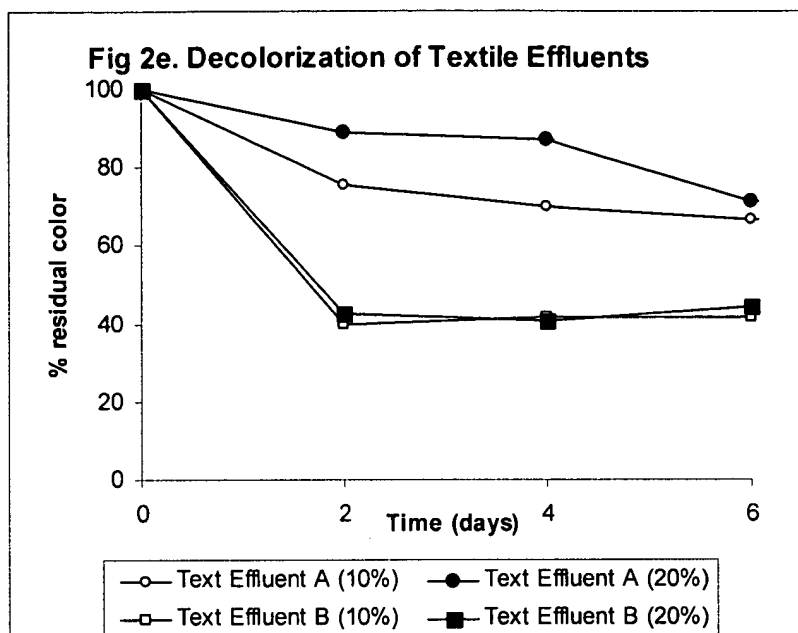


Fig 2e. Decolorization of Textile Effluents

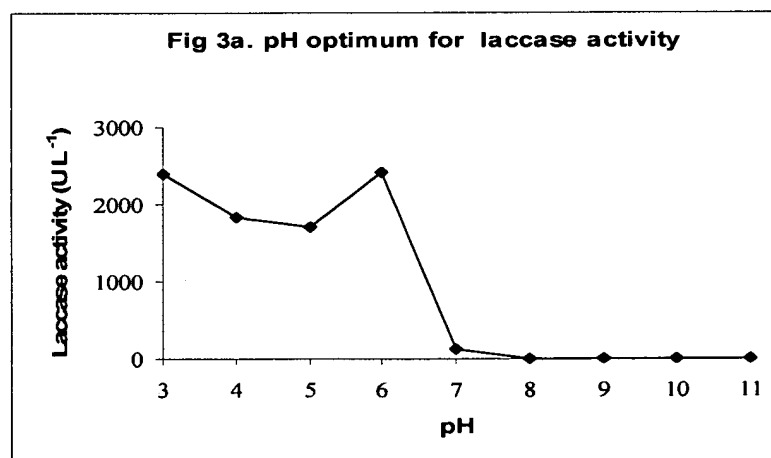


Fig 3a. pH optimum for laccase activity

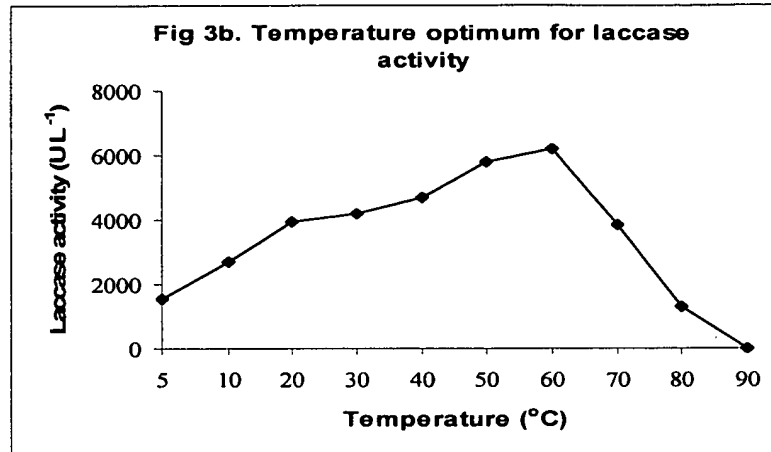


Fig 3b. Temperature optimum for laccase activity